


# MCX Multi-Channel Station

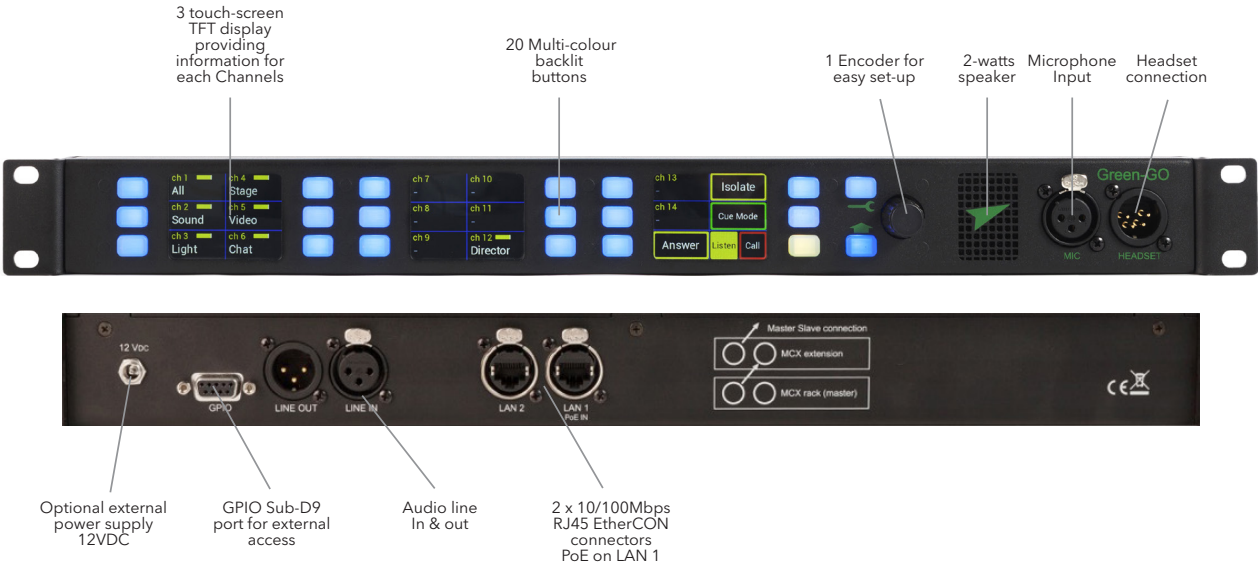

Due to its compact design, the 32 Channel MCX Rack integrates easily into any system. It offers the user direct access to up to 18 Channels or functions. On a second level, extended access is given to up to 32 Channels and 4 functions.

Three high-contrast colour touch-screen and 20 back-lit buttons allow for compact and precise operation, for speech, call or light signals.

The vast selection of connections offer a variety of possibilities. The user can communicate either through the built-in 2-watt speaker and an external microphone, or via a headset. In addition, it is possible to operate an external loudspeaker via the Line-Out connection, something which is particularly useful in noisy environments. External audio signals can easily be routed through the line-in port to all Green-GO subscribers via groups, for example a program audio.

The GPIO port allows external access to functions like talk or call of the Green-GO engine (light, ring and voice) via two inputs and two outputs for each.

**Features**

- MCX station can be extended with up to 9 Multi-Channel Extension slave devices
- Powered via PoE (802.3af-2003 Standard) or separate DC power supply
- Includes 2 EtherCON LAN sockets with 100MBit switch
- Intercom routing data, system setup & preferences are stored in local memory
- Create your own configuration with the free Green-GO Control software

**Technical Data**

- Dimensions: 485 x 110 x 45 mm
- Weight: 1.74kg
- Connections (Neutrik): 1 x XLR4M, 2 x XLR3F, 1 x XLR3M, 2 x RJ45 etherCON, 1 x Sub-D9, 1 x 12V DC
- Controls : 3 x Colour-TFT Touch-screen, 20 Backlit Buttons, 1 x Encoder
- Power Supply: PoE (802.3af) or optional 12V DC

**Accessory**

- GNM430 Microphone (430mm)
- GNM300 Microphone (300mm)



GNM430 Microphone

