

Highlights:

- 8 Mic/line inputs, 8 flex inputs/outputs and 8 outputs
- 24 fully flexible GPIO in- or outputs
- Up to 64 x 64 x Dante/ AES67 channels (16 x 16 included)
- Acoustic Echo Cancellation (4 channels) – Optional add-on
- Event Handler (trigger & timed event scheduling)
- Auto-update (OTA) feature
- WaveTune™ & WavePreset™ audio processing
- Superior sound quality & low latency
- Compatible with all AUDAC network control devices (incl 3 party equipment)
- 16 Stereo or up to 32 mono flexible zones (all combinations possible)

Product information:

The LUNA-F is the next-generation audio matrix processor, offering highly flexible and scalable system solutions for audio distribution from medium-sized to the largest enterprise solutions. The internal structure provides unseen flexibility and a vast number of possibilities for an audio distribution system. The powerful DSP's (dual SHARC) combined with 32-bit ADC and DAC converters allow the most extensive signal processing with superb audio quality.

It includes 8 Mic/Line Inputs, 8 flex channels that can be switched between 8 Mic/Line Inputs or Line level output, and 8 Line level outputs. Additionally, up to 64x64 Dante™/AES67 I/O Channels are available with primary and secondary ethernet ports, allowing the integration of the system with any Dante™/AES67 compatible audio over IP I/O units with redundancy.

The flexible architecture allows fully flexible mapping of the signal path to any of the 32 mono or 16 stereo zones, while the powerful DSP resources provide unique processing features on all input channels, output channels, and zones. Dante-enabled paging microphones and smart wall panels make the complete system solution even more flexible and unique.

The internal Linux core provides the entire control of the LUNA series while also accommodating messaging, event scheduling, and implementation possibilities for future Linux-based functions. In addition to full network control, RS-232 and RS-485 interfaces are available for receiving third-party serial communication. For your system solution, you can easily incorporate the control of the entire system and compatible devices into your user interface by using our simplified design and system control platform, AUDAC Touch™.



Certification:



Additional Inputs:



Applications:

- Corporate
- Sporting facilities
- Hotels
- Bars & Restaurants
- Education
- Government facilities

System specifications:

Inputs	Mic / Line inputs	8
	Flex inputs / outputs	8
	GPIO Inputs	24 (flex)
	USB Inputs (Type C)	Front (file transfer) Rear (file transfer)
		Mass storage for messages
Outputs	Line outputs	8
	GPIO Outputs	24 (flex)
	Fault	NO & NC relay contact
Network audio I/O		16x16 Dante™/AES67 I/O Channels (Up to 64x64 Channels with SL-NAC8)
Zones		32 Mono
		16 Stereo
Configurable settings	ALC (Automatic Gain control)	Yes
	AEC (Acoustic Echo cancellation)	Yes (optional)
	Integrated event scheduler	Yes
	Phantom power on inputs	+48 V DC
	WaveTune (input & zone)	7-band EQ
	WavePreset (output)	12xBiquad +LP+HP
	Delay (output)	2000 ms
	Mono / stereo zones (configurable)	Yes
	Mixing	Yes
	Talkover	Yes
	Paging	Yes
	Priorities	4 each zone
	Integrated generator	Sine or Pnoise or Wnoise
	Output Volume offset	Yes
	Others	Antiphase, bass & treble, input volume, ...
DSP Processor		Dual core SHARC
		ARM Linux core
		2 Dedicated co-DSP
Configuration		Audac Touch™
Controls & indicators	Front panel	2.8" LCD Display with rotary encoder
	Interface ports	RS-232


		RS-485
		2 x Gigabit Ethernet (RJ45 primary & secondary)
Power	Supply	100 ~ 240 V AC / 50 ~ 60 Hz
		24 V DC

Product Features:

Dimensions	482 x 44 x 335 mm (W x H x D)
Mounting	19"
Unit height	1 HE
Construction	Steel
Colours	Black (RAL9005)

Architects’ and Engineers’ Specifications:

The network audio processor shall be a flexible and scalable mixture of analog and network channels. It shall have dual SHARC DSPs with ARM core based on Linux combined with 32-bit ADC and DAC converters, allowing the most extensive signal processing with superb audio quality. The network audio processor shall have the co-DSP. It shall include 8 input channels, 8 flex I/O channels, and 8 output channels. Phantom power shall be available on all inputs, including the flex (input) channels. All analog inputs shall be able to carry line- and microphone-level signals. It shall have 16 x 16 Dante™/AES67 network audio I/O channels and shall have the capability of increasing up to 64 x 64 Dante™/AES67 network audio I/O channels with additional licenses. It shall have primary and secondary Ethernet ports, allowing the integration of the system with any Dante™/AES67 compatible audio over IP I/O units with redundancy. It shall have USB ports on the front and rear panels, and they shall be Type C. These inputs shall be used for file transfer and mass storage for voice files being played on announcements. Pre-gain shall be available for microphone/line level adjustment on physical inputs. The available DSP processing functionality on the inputs shall include Automatic Gain Control (AGC), high pass/low pass filtering, 7-band parametric equalizing, anti-feedback, 100 milliseconds of delay possibility, and trigger threshold. It shall include 32 mono or 16 stereo zones. Up to 16 inputs or zones shall be mappable via an Audio Bridge which shall be mixable in each of the available zones using the zone mixer feature. Each zone shall include talk over, paging volume control, four levels of priority, 7-band parametric equalizing, and compressor/limiter functionality. The output channels shall include gain setting, high pass/low pass filtering, 12-band parametric equalizing, 2000 milliseconds of delay possibility, and antiphase functionality. The device shall have four channels of Acoustic Echo Cancellation (AEC) functionality that can be activated with the optional license. The device shall have 24 fully flexible GPIO ports that can be configured as inputs or outputs. The GPIO ports shall have active low/high triggering, 0-33V configurable threshold level triggering, and edge triggering in the input configuration and open drain in the output configuration. The device shall be controllable intuitively through the 2.8" LCD display with a rotary encoder on the front panel or by using TCP/IP, RS-232, and RS-485 connection possibilities. A total system control platform shall be freely available and compatible with a wide variety of operating systems, including Android, iOS, Windows, and Mac. This platform shall allow simplified design and management of deployment with functional and informative widgets and dashboards in combination with third-party audio and video equipment control possibilities. It shall allow quick access to features such as I/O volume, mapping, mixing, source selection, and others. The device shall have an Over the air (OTA) auto-update feature. The power supply shall be a switching mode type operating on a 100~240 V AC/50~60 Hz mains network. Additionally, an emergency power inlet shall be provided to keep the system running on 24V emergency power when the main power is shut down. It shall be equipped with a removable power cord with a standard Schuko (CEE 7/7) AC plug. The connector on the chassis shall be a fused IEC C14 type. The network audio processor shall have a form factor of 19" and 1 RU.

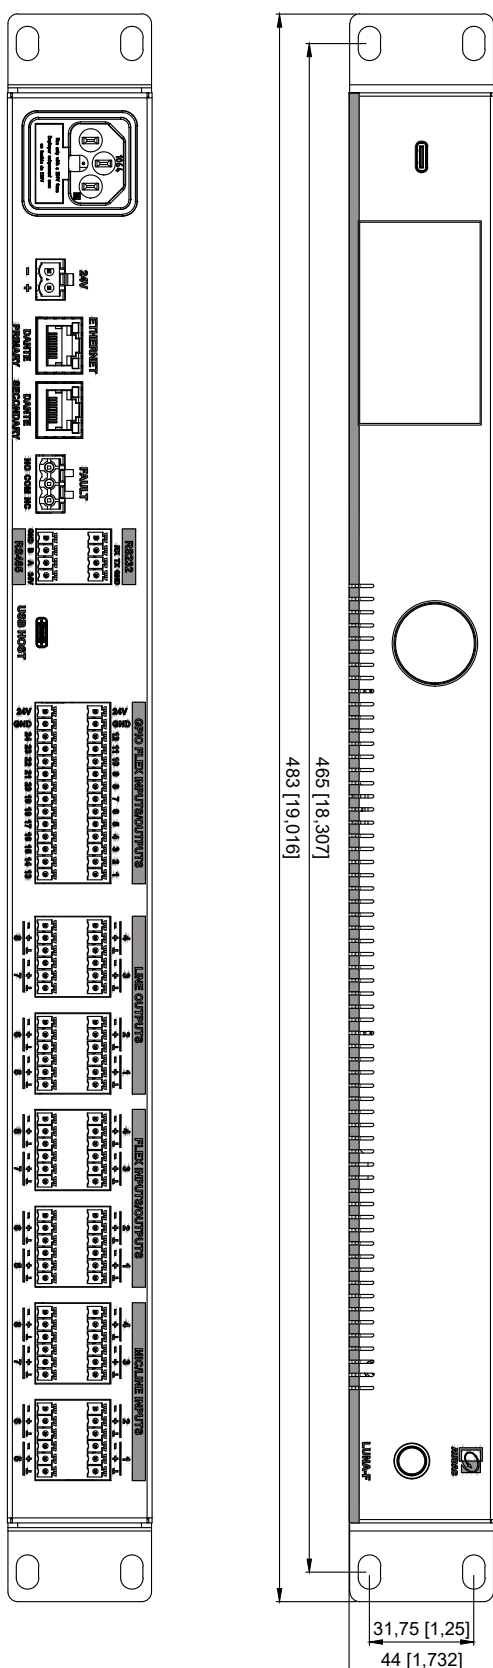

 AUDAC	LUNA-F		Product description FLEXIBLE NETWORKED AUDIO MATRIX PROCESSOR	
	MM [INCH]	Scale 1 : 2	Outer dimensions 483 x 44 x 317,5 mm 19 x 1,732 x 12,5" (w x h x d)	Unit height 1 HE