



FEATURES

- Four 5" low frequency drivers
- One 10" passive radiator
- Extended bass response down to 39 Hz
- Compact, lightweight and discreet
- IP55 + Salt Water Resistant

APPLICATIONS

- Restaurants
- Lounges
- Residential
- Hospitality
- Gardens

DESCRIPTION

The WSUB45 is an ultra compact, slim and powerful lightweight subwoofer. It is equipped with four 5" low frequency drivers and a single 10" passive radiator. This configuration allows the WSUB45 to provide potent bass reinforcement, with a maximum SPL of 123 dB, while maintaining an extremely compact footprint and very clean look.

The Wall Sub comes with removable rubber feet for floor deployment. The WSUB45 is only 6.6" (168 mm) deep. This unique form factor combines with its 12 rigging points to make it perfect for recessed or surface mounting on walls or ceilings. The Wall Sub can be paired with any of the loudspeakers in the Cannon Series to form a powerful and discreet installed audio system.

SPECIFICATIONS

Audio Specifications


- Description:** Passive, compact, narrow-profile installation subwoofer
- Bandwidth:** 39 Hz - 140 Hz (-6 dB preset dependent)
- Max SPL:** 123 dB SPL @ 1 m with preset
- Power:** 900 watts (program), 450 watts (AES)
- Directivity:** Omnidirectional
- Elements:** (4) 5" low frequency drivers, (1) 10" passive radiator
- Impedance:** 8 Ω
- Connectors:** (1) NL4

Mechanical Specifications


- IP Rating:** IP55 indoor/outdoor and salt water resistant
- Rigging:** (12) points M6
- Weight:** 25.1 lbs / 11.4 kg
- Construction:** Finland birch ply (urea glue), matte salt and UV resistant coating, 316 stainless steel hardware, 3D spacer mesh fabric
- Dimensions:** 11.7" (298 mm) x 6.6" (167 mm) x 23.5" (596 mm)
- Colors:** Stocking black and white, custom colors and fabrics available
- Accessories:** C-Clamps & Bridge Kit for wall and ceiling mounting, M6 Hanging Kit, Ceiling Tile Grille

DIRECTIVITY


Horizontal Polar Plot

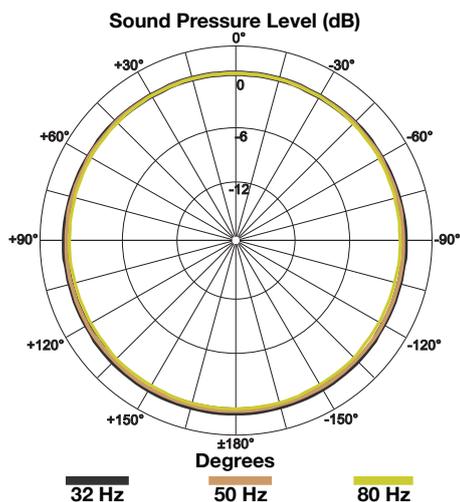


Horizontal Coverage

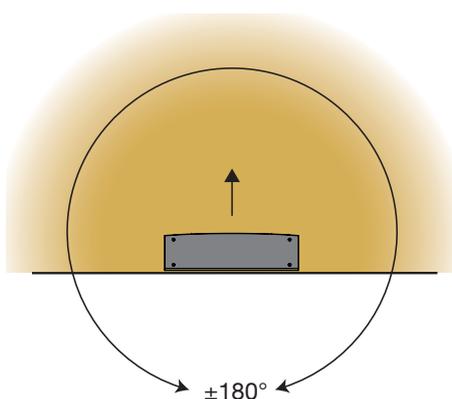


Vertical Coverage

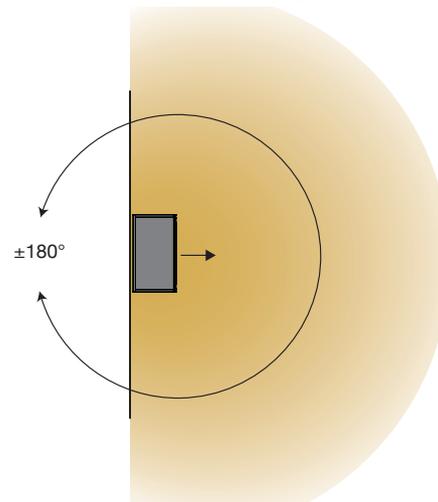

FREQUENCY RESPONSE

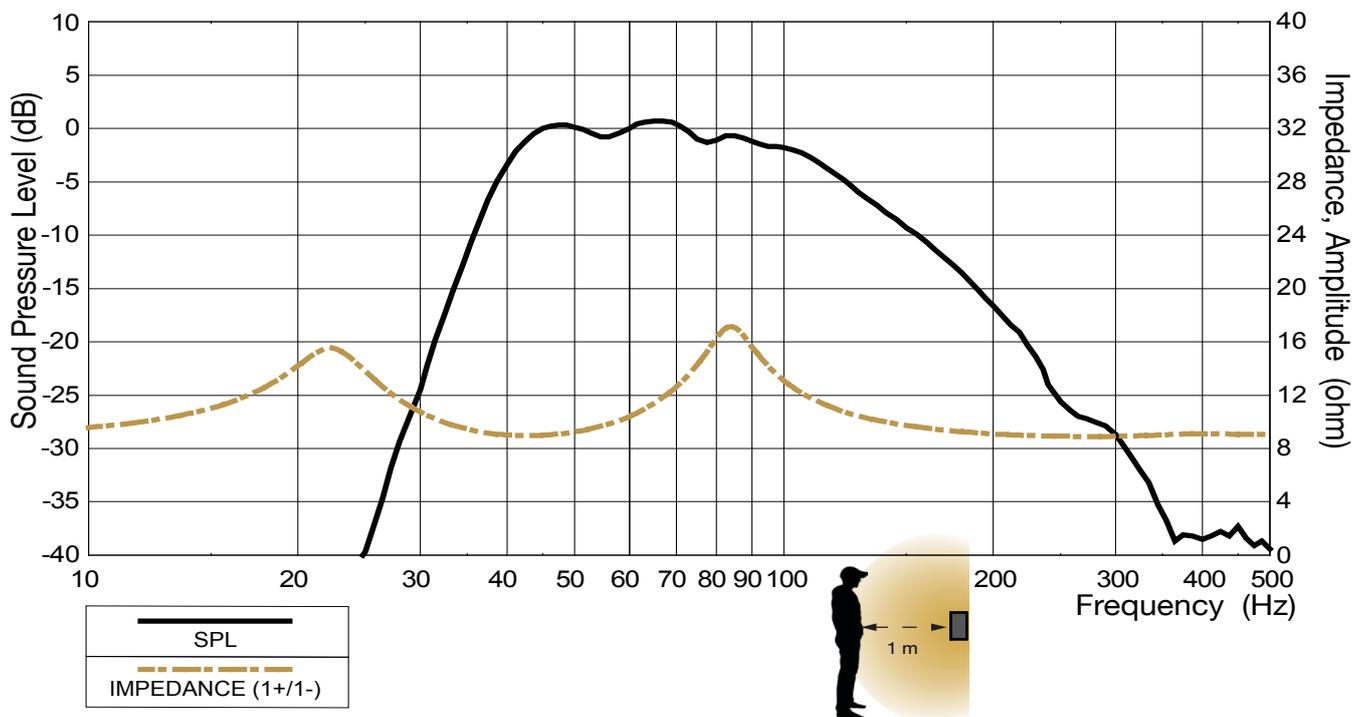


WIRING

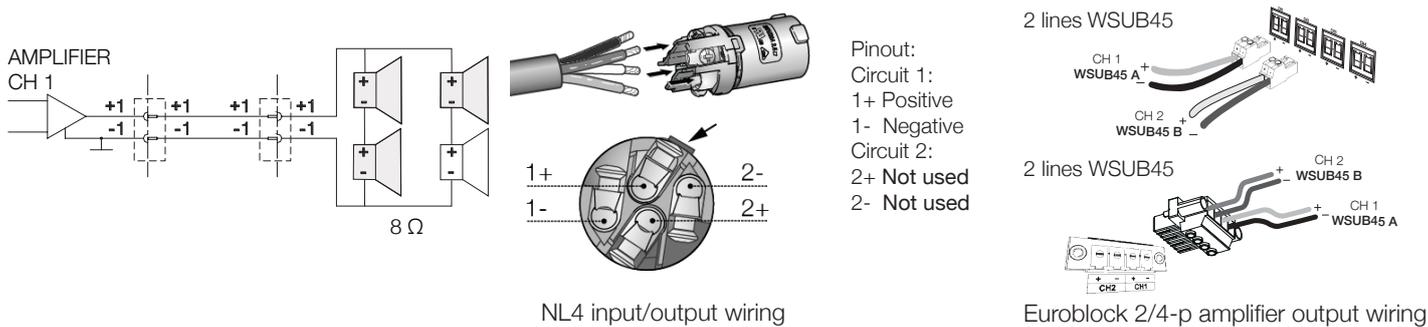


DIMENSIONS

RIGGING

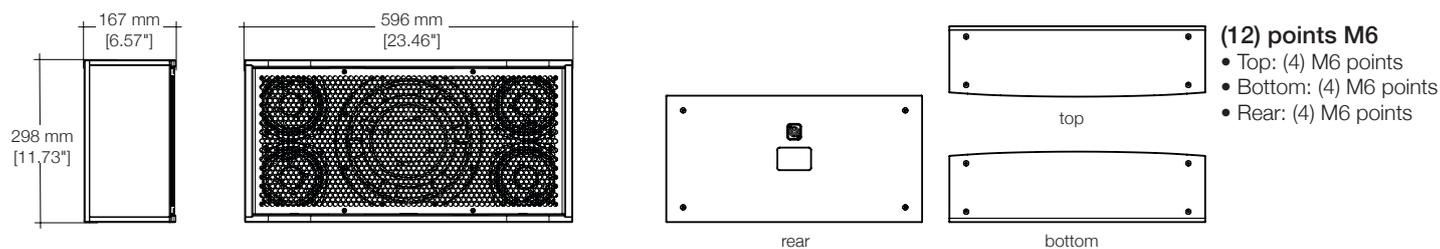

ACCESSORIES



Ceiling Tile Grille



M6 Hanging Kit



C-Clamps & Bridge Kit

Contact

For more product or service information please contact the 1 SOUND headquarters.

1 SOUND, Manufacturer
 USA Distributor
 34 Apple Street
 Tinton Falls, NJ 07724

tel. +1-732-798-9900
 sales@1-sound.com

Warranty

All manufactured 1 SOUND products are warranted to be free from defects in materials or workmanship for a period of 3 years from original purchase. If there is specific hardware or grilles you might want replaced or any repairs needed please contact your region's authorized 1 SOUND distributor.

